

Inspiring Great Spaces™



DIAMOND 10™ Coated Homogeneous Sheet

STARLUX®

Repeating text pattern at the bottom of the page, consisting of the words "HOM WOH" repeated in a grid-like fashion.

Inspiring Great Spaces™



DIAMOND 10™ TECHNOLOGY



Tough as Diamond
- Unique formulation with industrial diamond
- More compacted and tougher coating to protect the vinyl flooring



Easy to Clean
- Water/oil-based pollutants are difficult to penetrate into flooring
- More economic and quicker cleaning maintenance



More Durable
- Superb anti-scratching capability
- Double the average coating thickness of competitors
- Excellent user experience in durability




Anti-Chemical
- Prevent kinds of medicament and strong acid/alkali from damage to flooring
- Tolerate to daily repeated detergent treatment



K825A-208
W825-208

Marbling

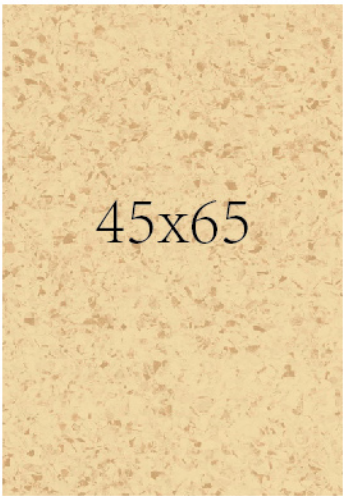

K825A-237 Montaigne
W825-237



K825A-104 Apricot
W825-104




K825A-121 Fog brown
W825-121




K825A-122 Starmond
W825-122



K825A-011 Pluto
W825-011

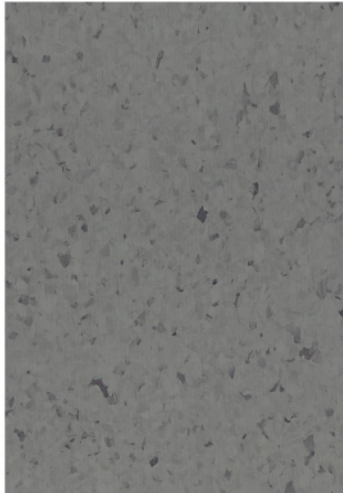


K825A-012 Black Star
W825-012

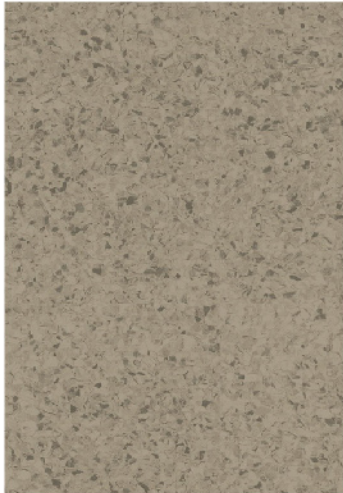

K825A-034 Sesame
W825-034




K825A-035 Midnight
W825-035

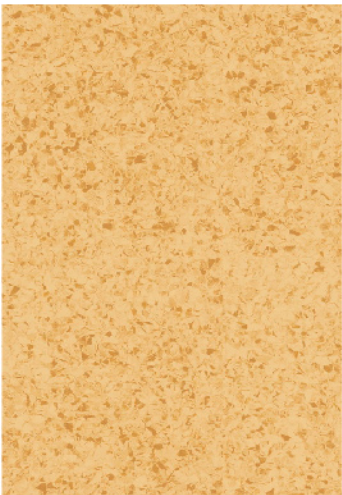

K825A-325
W825-325 Plume yellow



K825A-336
W825-336 Ginger gold

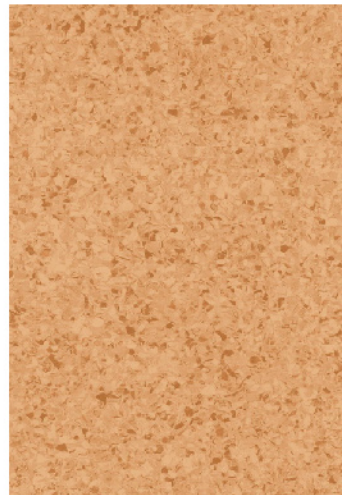

K825A-423
W825-423 Tinoti




K825A-430
W825-430 Chestnut



K825A-317
W825-317 Amber




K825A-319
W825-319 Softwood

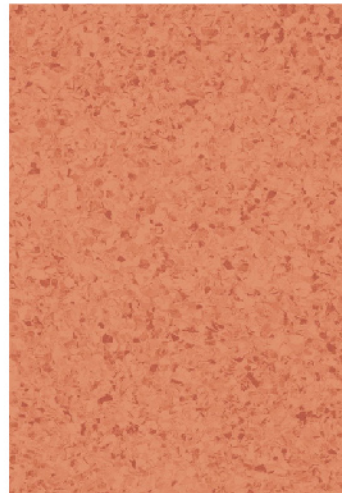

K825A-438
W825-438 Kermes




K825A-414
W825-414 Apollo

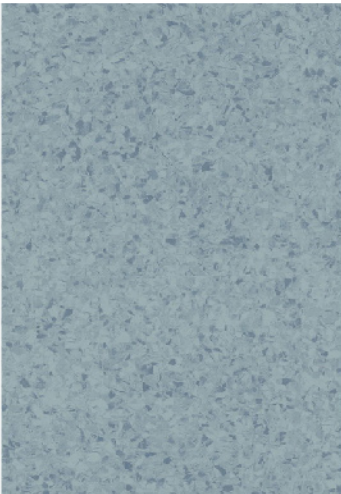


K825A-609
W825-609

Coast blue

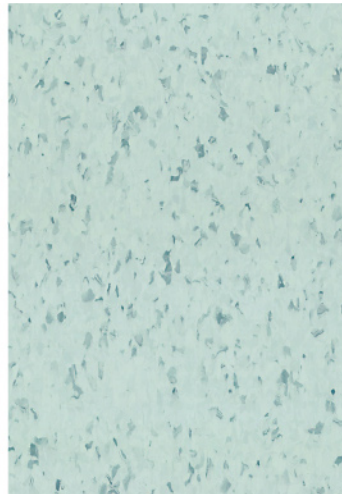

K825A-506
W825-506

Neptune

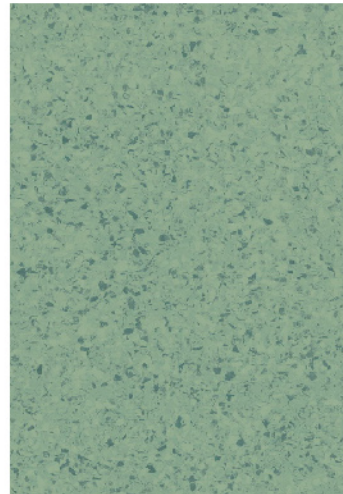


K825A-515
W825-515

Grove green




K825A-531
W825-531

Lichen green

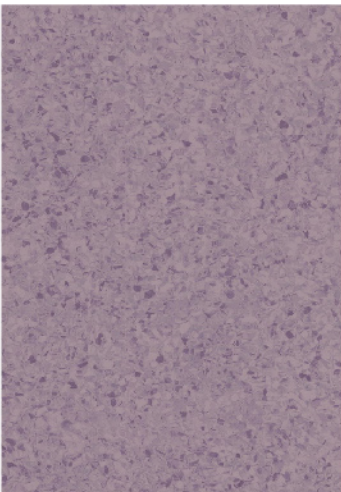


K825A-733
W825-733

Hydrangea

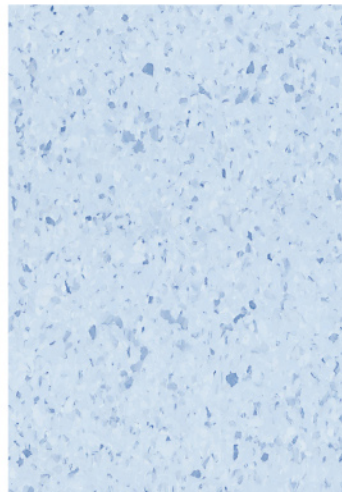

K825A-613
W825-613

Skyman

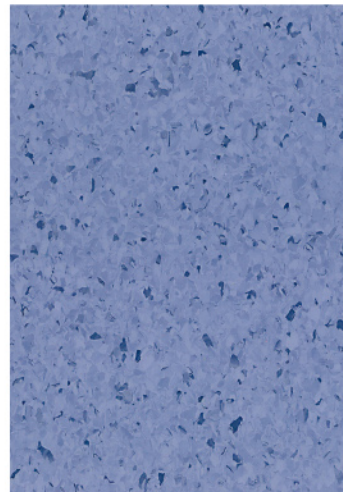

K825A-623
W825-623

Navy Blue



K825A-632
W825-632

Persia blue

Technical Data

Characteristics	Standard	Unit	Result
Type of flooring	ISO 10581-EN 649		Homogeneous Sheet
Material			Polyvinyl chloride
Coating			DIAMOND 10™
Safety criteria			
Flammability	GB 8624-2012/EN 13501-1	class	B1/B1fl-s1
Slip resistance	DIN 51130	group	R9
Dynamic coefficient of friction	EN 13893	class	DS
VOC	GB 18586-2001		Pass
DOP content	EN15777		None
Heavy metal	EN71-3		None
Impact sound reduction	ISO 10140/ISO 717-2	dB	3
Performance behaviour			
Sheet width	ISO 24341-EN 426	m	2
Sheet length	ISO 24341-EN 426	m	13-20
Overall thickness	ISO 24346-EN 428	mm	2.0
Total weight	ISO 23997-EN 430	kg/m ²	2.98
Wear resistance	EN649	group	T
Binder content	EN ISO 10581	Type	Type2
Dimensional stability	ISO 23999-EN434	-	X: < 0.4% ; Y: < 0.4%
Color fastness	ISO 105-B02	rating	6
Resistance to staining	EN 423		No Stain 0
Static electrical charge	EN 1815	KV	< 2.0



Sample piece in this sample folder is only for color reference, the structure and color of which may be varied in actual product supplying

www.armstrongflooring.asia

ARMSTRONG FLOORING OFFICES:

	TEL:	FAX:
Hong Kong	(852) 2585 7800	(852) 2598 7181
Singapore	(65) 6604 6836	(65) 6604 6835
Malaysia	(60) 379 323 331	(60) 379 606 331
Indonesia	(62) 21 2965 7866	(62) 21 2965 7867

