



Slip Retardant Flooring


SAFECARE®

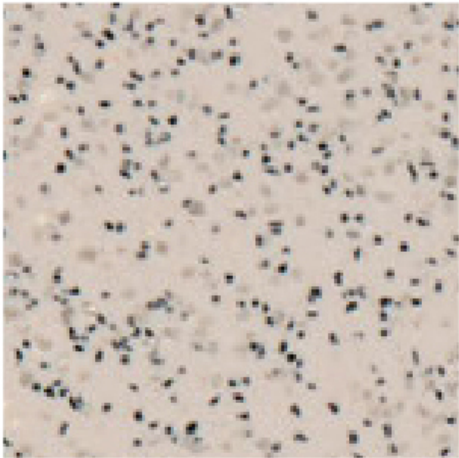


SC2001 Light Beige

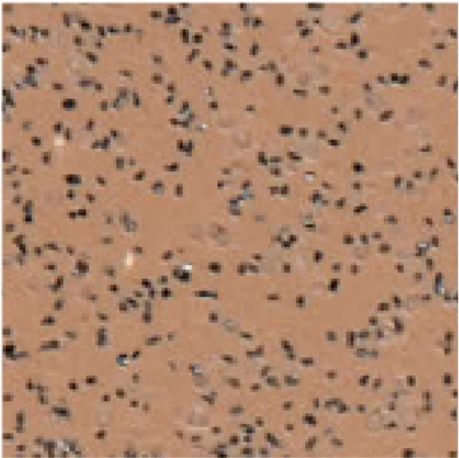


SC2002 Toffee Brown

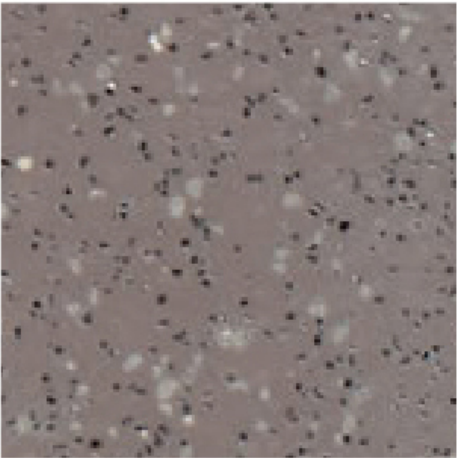


SC2014 Earth Brown

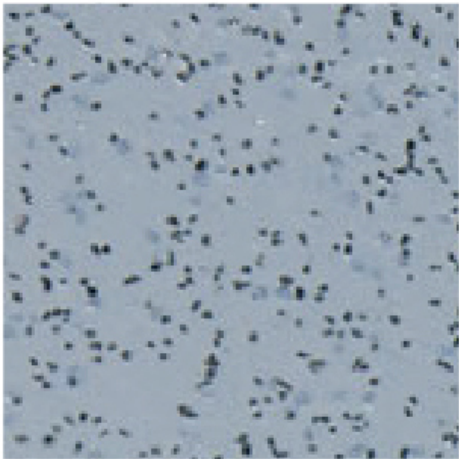


SC2004 Light Grey

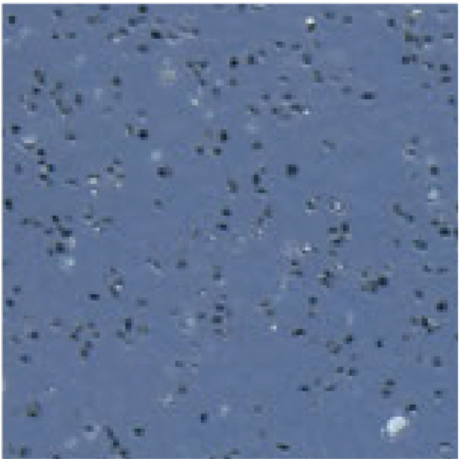


SC2005 Dusky Blue

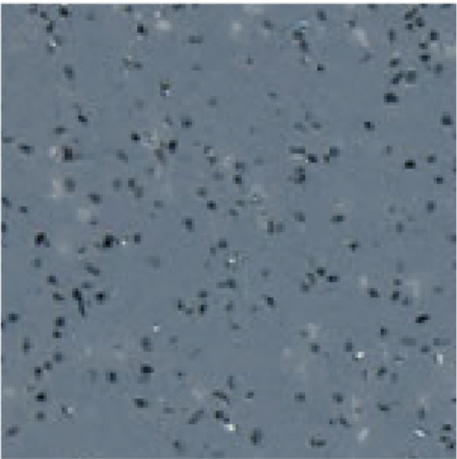


SC2006 Slate Grey

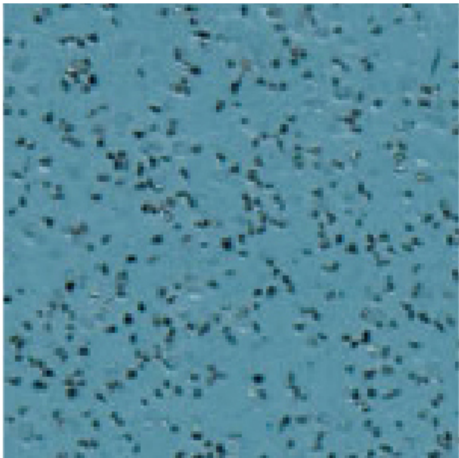


SC2007 Mid Blue

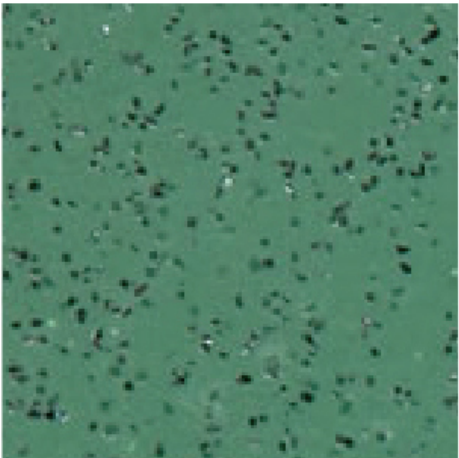


SC2013 Leaf Green

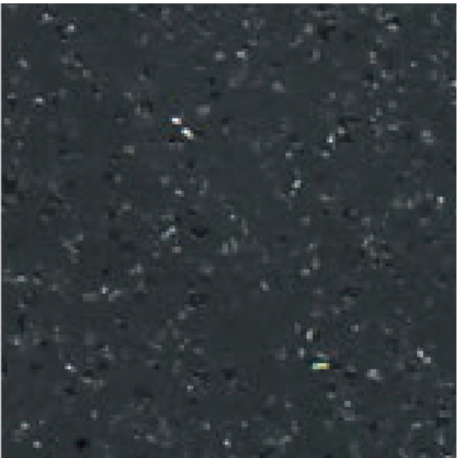


SC2009 Nearly Black

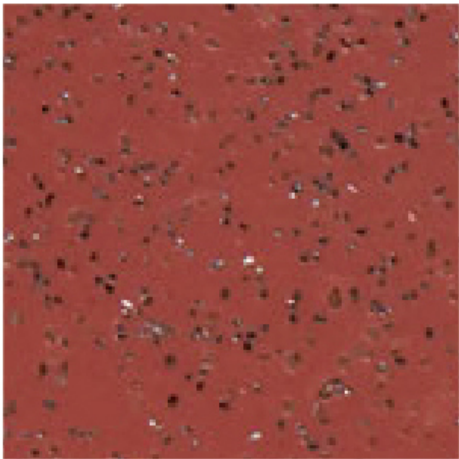


SC2015 Burnt Orange

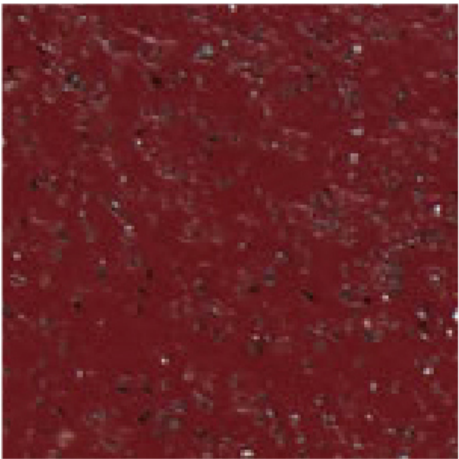

SC2012 Blood Red

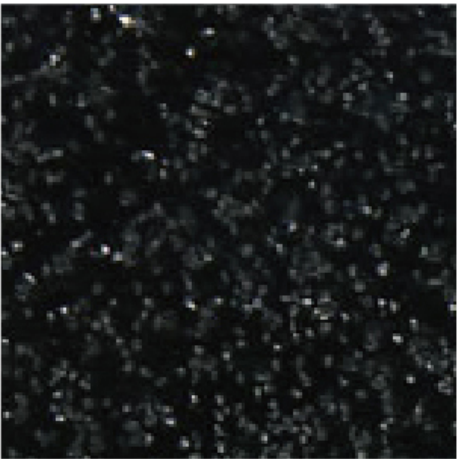

SC2010 Black

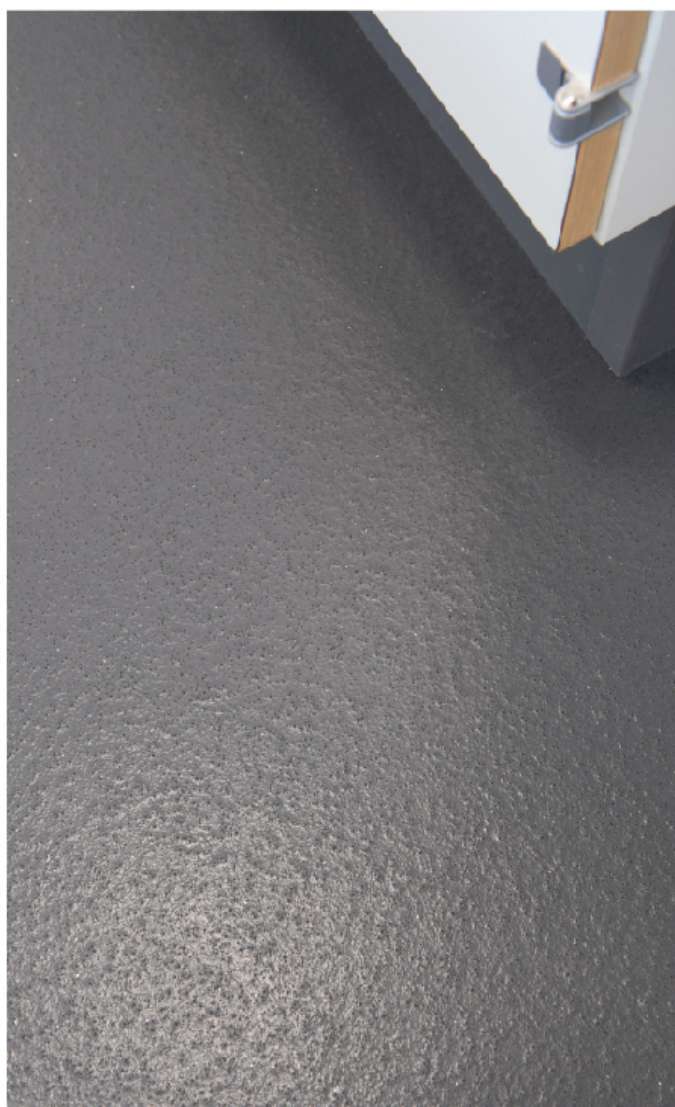

Technical Data

Test Item	Test Method	Test Result
Flooring type	EN 13845/EN 13553	Safety flooring
Classification for use	EN 685	34&43
Slip resistance	TRRL EN 13845 EN 13893 DIN 51130	≥ 36 ESf DS R10
Thickness	EN 428	2mm
Wear layer	EN 429	0.9mm
Flexibility	EN 435	Pass
Weight	EN 430	2.5 kg/m ²
Roll dimensions	EN 426	2.0mx20.00m-40m ²
Light fastness	EN 20105-B02	≥ 6
Sound insulation	ISO 140-8	4dB
Wear resistance	EN 13845	≤ 10% particles lost over 50000 cycles
Indentation	EN 433	≤ 0.10mm
Fire performance	EN 13501 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥ 8kW/m ² pass
Chemical resistance	EN 423	Good
Castor chair abrasion	EN 425	Pass
Under floor heating	EN 12667	Suitable
Electrical behaviours	EN 1815	≤ 2kV Antistatic
VOC emissions	prEN 15052 Section 01350 AgBB/BiBt	Low/Pass/Approved



PT. BIRU & SONS

Jl. Pintu Besar Selatan No. 93, Jakarta Barat 11110 – Indonesia

T : (021) 690 9893/ 690 6788

F : (021) 690 9892

E : flooring@biruindonesia.com/ contactus@biruindonesia.com